

Appendix  
A

**ISPF/PDF  
COMMAND  
SUMMARY**

*Get on the  
Fast Track!*



TM

**SYS-ED/  
COMPUTER  
EDUCATION  
TECHNIQUES, INC.**

---

**1 Member List Commands**Primary Commands

LOCATE member-name

SELECT member-name

Line Selection Commands

S (select) - except option 3.4

P (print) - option 3.4 only

R (rename) - option 3.4 only

D (delete) - option 3.4 only

B (browse) - option 3.4 only

E (edit) - option 3.4 only

M (members) - option 3.4 only

---

**2 Browse Commands**

CAPS [ON]  
[OFF]

COLS

FIND string [NEXT ] [CHARS ] [col-1 [col-2]]  
F [ALL ] [PREFIX]  
[FIRST] [SUFFIX]  
[LAST ] [WORD ]  
[PREV ]

HEX [ON] [VERT]  
[OFF] [DATA]

LOCATE line-number  
L label

.XXXX

RESET  
RES

---

### 3 Edit Primary Commands

AUTOLIST [ON]  
[OFF]

AUTONUM [ON]  
[OFF]

CANcel

CAPS [ON]  
[OFF]

CHANGE string-1 string-2 [NEXT ][CHARS ][X ]  
C [ALL ][PREFIX ][NX ]  
[FIRST ][SUFFIX ][LAST ][WORD ]  
[PREV ]  
[col-1 ][col-2]  
(Searches only within the BNDS area)

COPY [member-name]  
(Requires A/B Line Command)

CREATE [member-name]  
(Requires A/B Line Command)

FIND string-1 [NEXT ][CHARS ][X ]  
F [ALL ][PREFIX ][NX ]  
[FIRST ][SUFFIX ]  
[LAST ][WORD ]  
[PREV ]  
[col-1 ][col-2]  
(Searches only within the BNDS area)

HEX [ON] [VERT]  
[OFF] [DATA]

LOCATE line-number  
L

MODEL [[class-name.]model-name [:qualifier...]]  
[CLASS [class-name]]  
(Requires A/B Line Command)

MOVE [member-name]  
(Requires A/B Line Command)

NULLS [ON] [ALL]  
[OFF]

NUMBER [ON] [STD] [COBOL] [DISPLAY]  
NUM [OFF]

PROfile [name] [number]

RECover [ON]  
[OFF]

RENUM [STD] [COBOL] [DISPLAY]

REPLACE [member-name]  
(Requires A/B Line Command)

RESet

SAVE

STATS [ON]  
[OFF]

SUBmit

TABS      [ON ] [ALL]  
            [OFF]

TAB ON    [tab-char]                      Used with TABS Line Command

TSO SUB   [group-qualifier(member)]    Used with SAVE Command  
            ['userid.group.CNTL(member)']

UNNUM

---

#### 4 FIND/CHANGE Strings (BROWSE AND EDIT)

##### Character String Format

Simple string:	cccccc	(no embedded blanks or commas)
Previous string:	*	(single asterisk)
Delimited string:	`cccc' or "cccc"	(for embedded blanks, commas)
Hex string:	X`hhhh' or `hhhh'X	
Text string:	T`cccc' or `cccc'T	
Picture string:	P`ssss' or `ssss'P	

##### Picture Strings - Special Character:

P`=' - any character (don't care)

P`-' - any non-blank character

P`. ' - any non-displayable (invalid) character

P`#' - any numeric character (0-9)

P`-' - any non-numeric character

P`@' - any alphabetic character (uppercase or lowercase)


P`<' - any lowercase character

P`>' - any uppercase alphabetic character

P`\$' - any special character (not alphabetic or numeric)

If an APL or TEXT keyboard is being used, the following additional character is defined:

P`+' - any APL-specific or TEXT-specific character

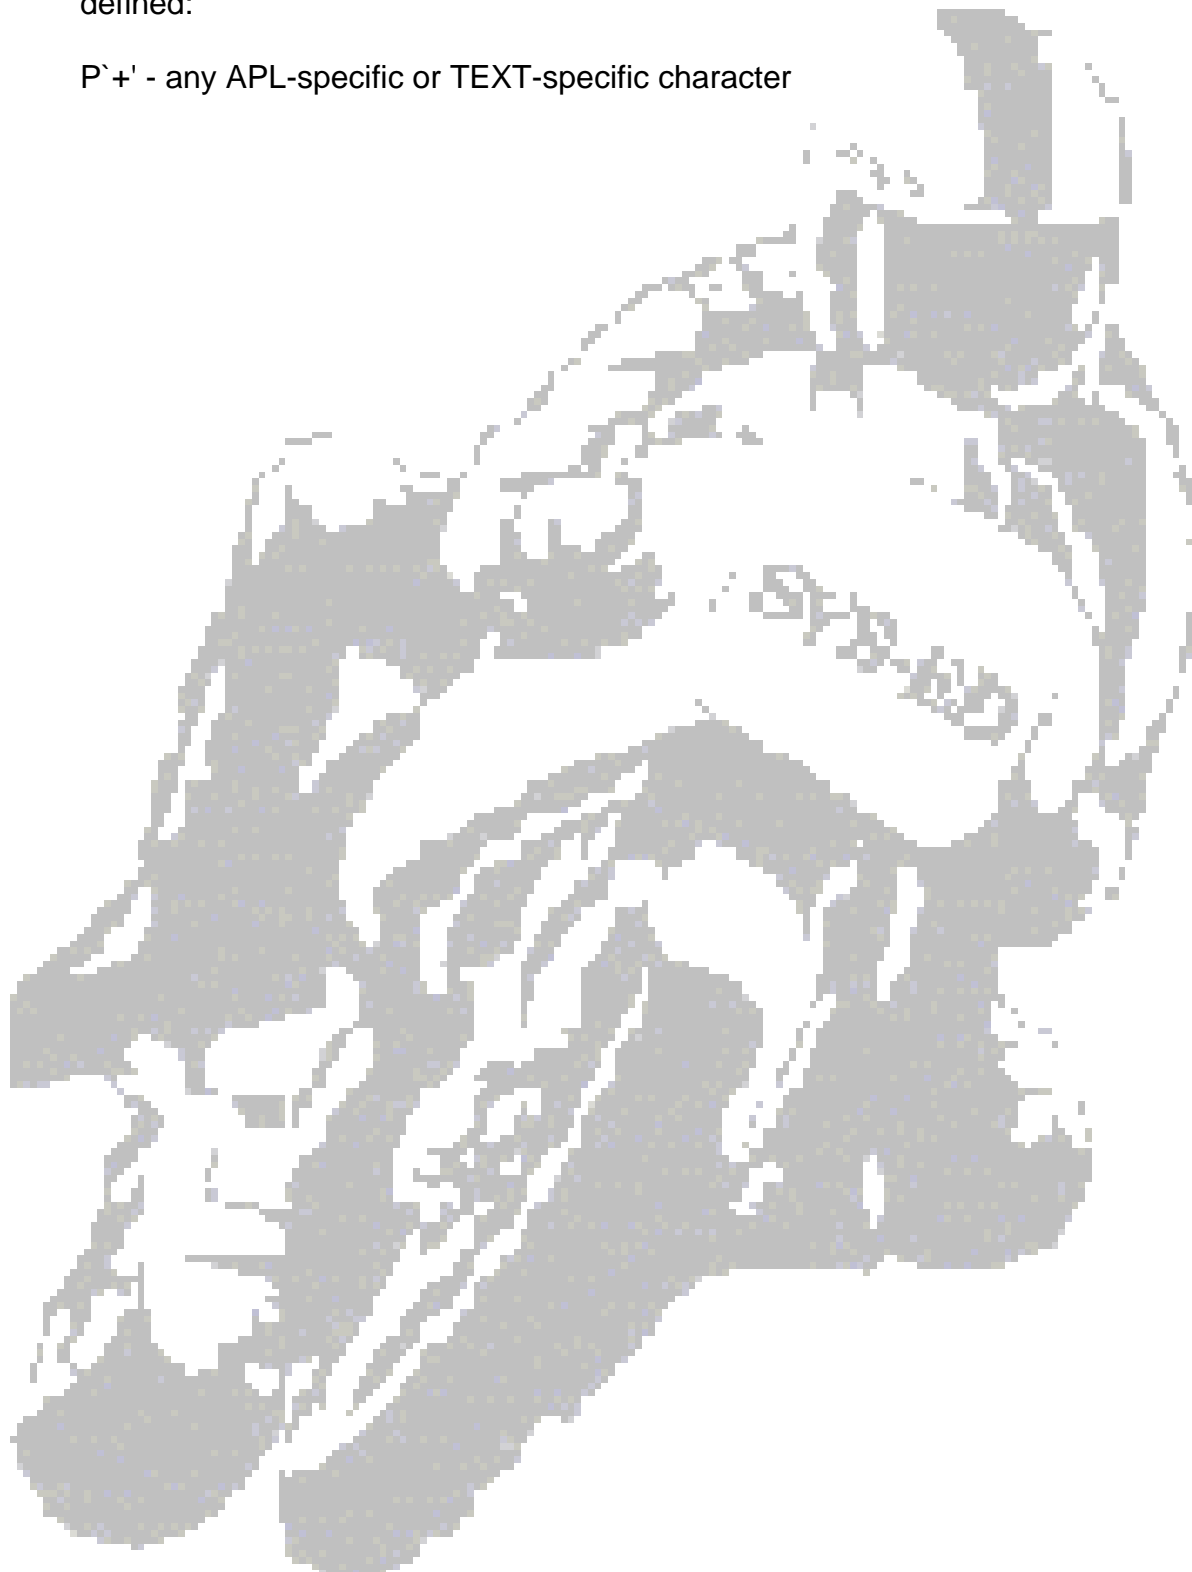



---

**5 Edit Line Commands**

A, An	After }	Used with the MOVE/COPY
B, Bn	Before}	commands
COLS		
C, Cn, CC	Copy	
D, Dn, DD	Delete	
F, Fn	First	Used with eXclude
I, In	Insert	
L, Ln	Last	Used with eXclude
MASK		
M, Mn, MM	Move	
R, Rn, RR, RRn	Repeat	
S, Sn	Show	Used with eXclude
TABS		Used with TAB ON Primary command
X, Xn, XX	eXclude	

The following are affected by the BNDS margin settings:

BOUNDS, BNDS

O, On, OO

Overlay

Used with C on template

TE, TEn

Text Entry

TF, TFn

Text Flow

TS, TSn

Text Split

<, <n, <<, <<n

data left

>, >n, >>, >>n

data right

(, (n, ((, ((n

cols left }

Use with COBOL

), )n, )) , ))n

cols right }