

Appendix
A

**ISPF/PDF
COMMAND
SUMMARY**

*Get on the
Fast Track!*



TM

**SYS-ED/
COMPUTER
EDUCATION
TECHNIQUES, INC.**

1 Member List CommandsPrimary Commands

LOCATE member-name

SELECT member-name

Line Selection Commands

S (select) - except option 3.4

P (print) - option 3.4 only

R (rename) - option 3.4 only

D (delete) - option 3.4 only

B (browse) - option 3.4 only

E (edit) - option 3.4 only

M (members) - option 3.4 only

2 Browse Commands

CAPS [ON]
[OFF]

COLS

FIND string [NEXT] [CHARS] [col-1 [col-2]]
F [ALL] [PREFIX]
[FIRST] [SUFFIX]
[LAST] [WORD]
[PREV]

HEX [ON] [VERT]
[OFF] [DATA]

LOCATE line-number
L label

.XXXX

RESET
RES

3 Edit Primary Commands

AUTOLIST [ON]
[OFF]

AUTONUM [ON]
[OFF]

CANcel

CAPS [ON]
[OFF]

CHANGE string-1 string-2 [NEXT][CHARS][X]
C [ALL][PREFIX][NX]
[FIRST][SUFFIX][LAST][WORD]
[PREV]
[col-1][col-2]
(Searches only within the BNDS area)

COPY [member-name]
(Requires A/B Line Command)

CREATE [member-name]
(Requires A/B Line Command)

FIND string-1 [NEXT][CHARS][X]
F [ALL][PREFIX][NX]
[FIRST][SUFFIX]
[LAST][WORD]
[PREV]
[col-1][col-2]
(Searches only within the BNDS area)

HEX [ON] [VERT]
[OFF] [DATA]

LOCATE line-number
L

MODEL [[class-name.]model-name [:qualifier...]]
[CLASS [class-name]]
(Requires A/B Line Command)

MOVE [member-name]
(Requires A/B Line Command)

NULLS [ON] [ALL]
[OFF]

NUMBER [ON] [STD] [COBOL] [DISPLAY]
NUM [OFF]

PROfile [name] [number]

RECover [ON]
[OFF]

RENUM [STD] [COBOL] [DISPLAY]

REPLACE [member-name]
(Requires A/B Line Command)

RESet

SAVE

STATS [ON]
[OFF]

SUBmit

TABS [ON] [ALL]
 [OFF]

TAB ON [tab-char] Used with TABS Line Command

TSO SUB [group-qualifier(member)] Used with SAVE Command
 ['userid.group.CNTL(member)']

UNNUM

4 FIND/CHANGE Strings (BROWSE AND EDIT)

Character String Format


| | | |
|-------------------|--------------------|--------------------------------|
| Simple string: | cccccc | (no embedded blanks or commas) |
| Previous string: | * | (single asterisk) |
| Delimited string: | `cccc' or "cccc" | (for embedded blanks, commas) |
| Hex string: | X`hhhh' or `hhhh'X | |
| Text string: | T`cccc' or `cccc'T | |
| Picture string: | P`ssss' or `ssss'P | |

Picture Strings - Special Character:

- P`=' - any character (don't care)
- P`-' - any non-blank character
- P`. ' - any non-displayable (invalid) character
- P`#' - any numeric character (0-9)
- P`-' - any non-numeric character
- P`@' - any alphabetic character (uppercase or lowercase)
- P`<' - any lowercase character
- P`>' - any uppercase alphabetic character
- P`\$' - any special character (not alphabetic or numeric)

If an APL or TEXT keyboard is being used, the following additional character is defined:

P`+' - any APL-specific or TEXT-specific character

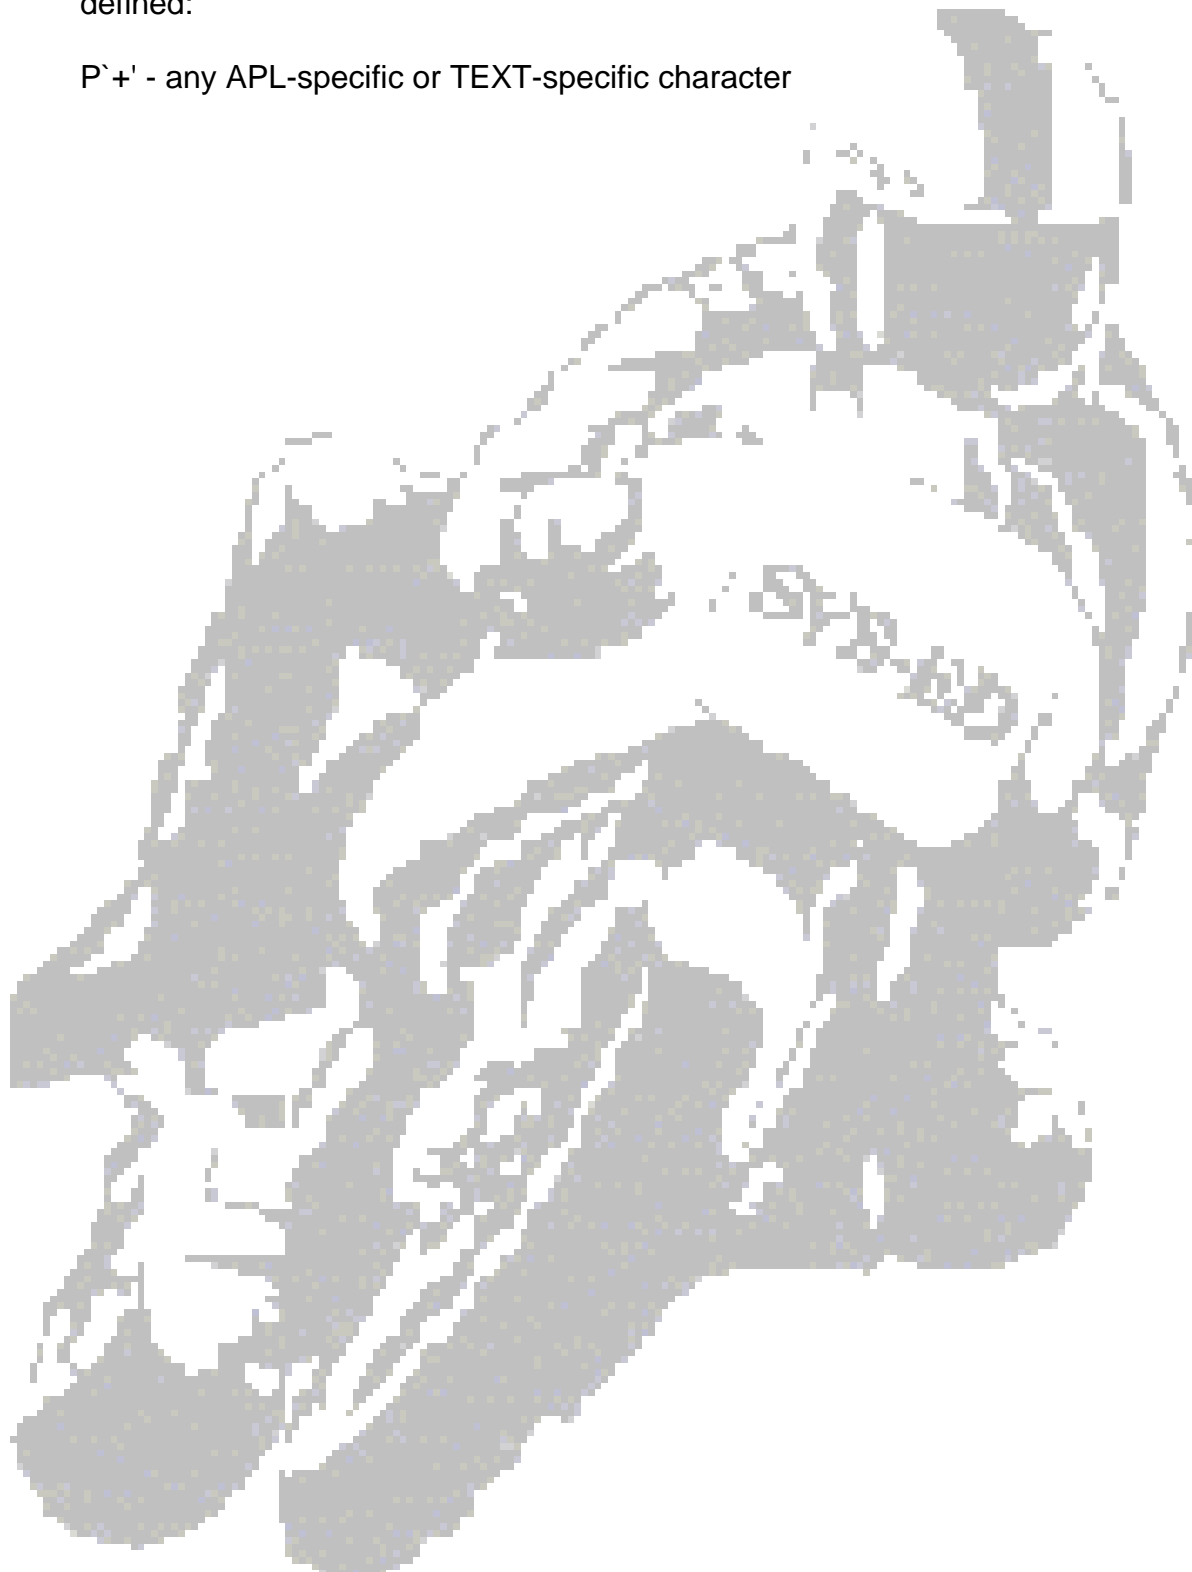

5 Edit Line Commands

| | | |
|----------------|---------|----------------------------------|
| A, An | After } | Used with the MOVE/COPY |
| B, Bn | Before} | commands |
| COLS | | |
| C, Cn, CC | Copy | |
| D, Dn, DD | Delete | |
| F, Fn | First | Used with eXclude |
| I, In | Insert | |
| L, Ln | Last | Used with eXclude |
| MASK | | |
| M, Mn, MM | Move | |
| R, Rn, RR, RRn | Repeat | |
| S, Sn | Show | Used with eXclude |
| TABS | | Used with TAB ON Primary command |
| X, Xn, XX | eXclude | |

The following are affected by the BNDS margin settings:

BOUNDS, BNDS

O, On, OO

Overlay

Used with C on template

TE, TEn

Text Entry

TF, TFn

Text Flow

TS, TSn

Text Split

<, <n, <<, <<n

data left

>, >n, >>, >>n

data right

(, (n, ((, ((n

cols left }

Use with COBOL

),)n,)) ,))n

cols right }